

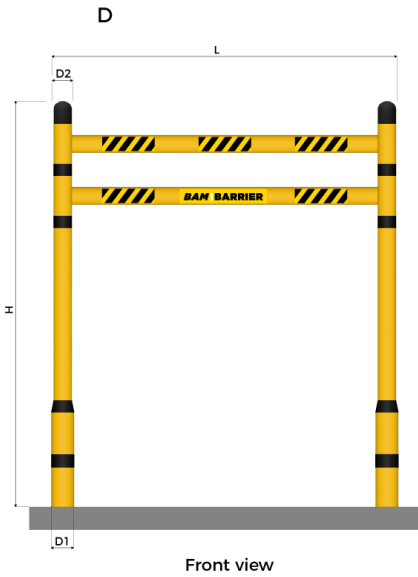
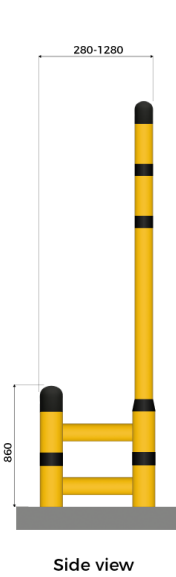


HEIGHT RESTRICTION BARRIERS

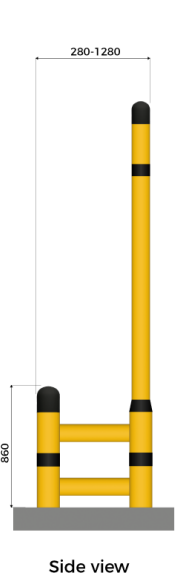

HEIGHT RESTRICTION BARRIERS

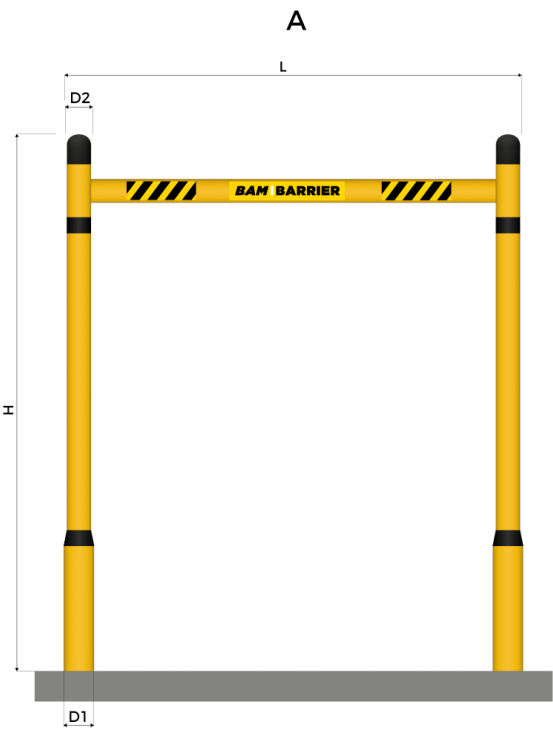

Colour options



Bollards


Diameter D1/D2 - mm	Height H - mm	Resistance joules	Anchoring Pullout kN	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
140/120	1600-4080	23950	60	1 370	59	UL94: HB

Rails

Diameter mm	Height H - mm	Length L - mm	Resistance joules	Total Floor Space mm	IP Grade	Flame Extinguishing Rate
55	110	2000-3000-4000	7 930	250	59	UL94: HB

Customized solution and colours upon request

FLEXAFE™
Cutting-Edge Polymer material, designed specifically to absorb high-level impacts in a very small space. It is food-safe, doesn't break or flake, and 100% recyclable.




ROOTLOCK®
World's most advanced and safe


HEIGHT RESTRICTION BARRIERS



Anchorage System. It helps the floor to absorb violent and repeat vehicles impacts without damaging the floor.



Cutting-edge
Anchorage System
Design



Anti-Shrinkage
Cement